



PANZERFLEX - L - (N)SHTÖU - J / - O

0,6/1 kV

www.b-cables.be 


Low Voltage Reeling Cable suitable for reeling & festoon systems

Laag spanning (LS)
Basse tension (BT)

Beschrijving van de kabel / Construction du câble


- 1 Kern / Ame**
Electrolytic Copper Tinned, flexible cl EN 60228
- 2 Isolatie/Isolation**
HEPR compound better than 3GI3
- 3 Tussenmantel / Manteau intermediaire**
Polychloroprene rubber based compound
Reinforced Anti-torsion Braid made of Synthetic Yarnsin an vulcanized bond between two sheaths
- 4 Buitenmantel / Gaine extérieure**
Black Polychloroprene rubber compound

Markering / Marquage

Palazzo Panzerflex - L 0,6/1 KV (number of cores) x (cross section)

Normen / Normes

DIN VDE 0250, PART 814

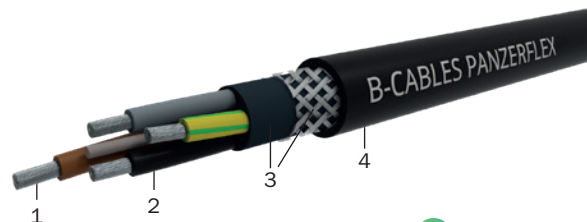

 prysmian

Dimensionele karakteristieken / Caractéristiques dimensionnelles

Aantal geleiders / Nombre de conducteurs

Sectie / Section

3 4 5 7 12 18 30 36 44 56

1,5 2,5 4 6 10 16 25 35 50 70 120 150 185 240